

# CL2


## Unipolar Current Regulator

### 5-30mA Temperature Compensated

Preliminary - February 2021

#### Features

- Limits regulated current
- 5mA, 10mA, 15mA, 20mA, 30mA Versions
- Enable pin
- Rejects 50Hz / 60Hz ripple
- 250V maximum operating voltage
- Zero external components
- Can be paralleled for high current

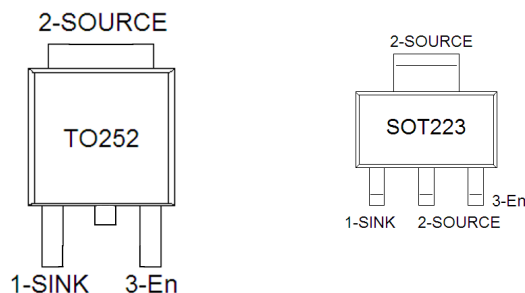

#### Description

The CL2 product family are temperature compensated unipolar current regulator with an enable pin available in 5mA to 30mA versions. It is designed to be used under a wide range of voltages, from 6V to 250V DC. The CL2 is primarily intended as a current limiting LED driver for serial LED applications in industrial lamp indicators, signage, accent and automotive lightning. Other applications include constant current source and sink. The CL2 temperature coefficient is optimized from -40C to 125C. The CL2 will source or sink constant current. The CL2 will likely require a heat sink connected to the Source (pin 2).

#### Absolute Maximum Ratings


Maximum operating voltage (see Note 1)	300V DC
Maximum Enable voltage	10V DC
Operating free air temperature range	-40°C to 85°C
Storage Temperature	-40°C to 85°C
ESD tolerance, human body model	500V

Note 1: All voltages are with respect to Source

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or beyond those conditions indicated under "Recommended Operating Conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended period may impact device reliability.

#### Recommended Operating Conditions

	Min	Max	Unit
Operating Voltage	8	250	V DC
Operating free air temperature	-40	85	°C



# CL2


## Unipolar Current Regulator

### 5-30mA Temperature Compensated

Preliminary - February 2021

	Min	Max	Unit
$V_{Enable}$	0	8	V DC

### Functional Block Diagram

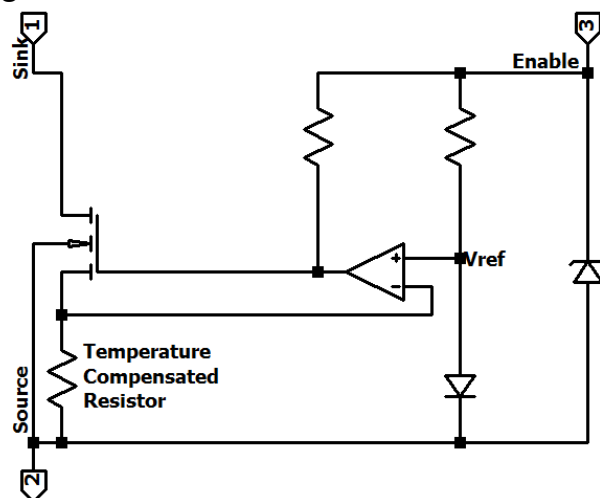


### Concept of Operation

This chip is powered by applying a voltage difference between Sink and Source terminal. As the Enable voltage rises, the N-Channel MOSFET begins to conduct current between Sink and Source terminals. The temperature compensated source resistor senses this current and provides this feedback voltage to the non-inverting input of the operational amplifier. The operational amplifier compares the feedback voltage with the reference voltage provided by a p-n junction. The operational amplifier drives the gate of the N-channel MOSFET such that the feedback voltage and the reference voltage remain equal.

p-n functions exhibit a negative temperature coefficient of approximately  $-2\text{mV}/^\circ\text{C}$ . The Source resistor is temperature compensated to match the temperature coefficient of the p-n junction. In this way, the regulated current flowing between Sink and Source will be (to a first order) independent of the chip junction temperature.

The power dissipated by the chip is given simply as  $I_{lim} * (V_{Sink} - V_{Source})$ . The chip will likely require a heat sink mechanically connected to the Source terminal (pin 2).



# CL2

## Unipolar Current Regulator

### 5-30mA Temperature Compensated

Preliminary - February 2021

#### Terminal Definition


Terminal Name	Pin No.	Type	Description
Sink	1	HV Input	Sinks the load current.
Source	2	VH Input	Usually Ground. Sources the load current.
Enable	3	Input	Enables current flow between Sink and Source.

#### Electrical Characteristics

$V_{\text{Sink}} - V_{\text{Source}} = 20\text{V}$ , Temp = 25°C unless otherwise specified

##### 30mA nominal

Parameter	Min	Typ	Max	Unit
Regulated Current ( $I_{\text{lim}}$ ) at 25°C	25.7	30	34.4	mA
Regulated Current ( $I_{\text{lim}}$ ) at -40°C		29.3		mA
Regulated Current ( $I_{\text{lim}}$ ) at +85°C		28.4		mA
Operating voltage for 90% regulated current	2.0	3.0	4.0	V
Absolute Temperature Coefficient (20V)		7.6		$\mu\text{A} / ^\circ\text{C}$
Voltage Coefficient (20V to 250V)		0.4	0.6	mA / 100V
AC Resistance	165	240		k $\Omega$
$V_{\text{Enable}}$ fo 90% regulated current	2.0	3.1	4.0	V
$V_{\text{Enable}}$ current ( $V_{\text{Enable}} = 5\text{V}$ , 25°C)		18	30	$\mu\text{A}$
$V_{\text{Enable}}$ current ( $V_{\text{Enable}} = 8\text{V}$ , 85°C)		65		$\mu\text{A}$



# CL2

## Unipolar Current Regulator

### 5-30mA Temperature Compensated


Preliminary - February 2021

#### 20mA nominal

Parameter	Min	Typ	Max	Unit
Regulated Current ( $I_{lim}$ ) at 25°C	17.1	20.0	22.9	mA
Regulated Current ( $I_{lim}$ ) at -40°C		19.5		mA
Regulated Current ( $I_{lim}$ ) at +85°C		18.9		mA
Operating voltage for 90% regulated current	2.0	3.0	4.0	V
Absolute Temperature Coefficient (20V)		7.6		$\mu A / ^\circ C$
Voltage Coefficient (20V to 250V)		0.4	0.6	mA / 100V
AC Resistance	165	240		k $\Omega$
$V_{Enable}$ fo 90% regulated current	2.0	3.1	4.0	V
$V_{Enable}$ current ( $V_{Enable} = 5V, 25^\circ C$ )		18	30	$\mu A$
$V_{Enable}$ current ( $V_{Enable} = 8V, 85^\circ C$ )		65		$\mu A$

#### 15mA nominal

Parameter	Min	Typ	Max	Unit
Regulated Current ( $I_{lim}$ ) at 25°C	12.8	15	17.2	mA
Regulated Current ( $I_{lim}$ ) at -40°C		14.6		mA
Regulated Current ( $I_{lim}$ ) at +85°C		14.2		mA
Operating voltage for 90% regulated current	2.0	3.0	4.0	V
Absolute Temperature Coefficient (20V)		7.6		$\mu A / ^\circ C$
Voltage Coefficient (20V to 250V)		0.4	0.6	mA / 100V
AC Resistance	165	240		k $\Omega$
$V_{Enable}$ fo 90% regulated current	2.0	3.1	4.0	V
$V_{Enable}$ current ( $V_{Enable} = 5V, 25^\circ C$ )		18	30	$\mu A$
$V_{Enable}$ current ( $V_{Enable} = 8V, 85^\circ C$ )		65		$\mu A$



# CL2

## Unipolar Current Regulator

### 5-30mA Temperature Compensated


Preliminary - February 2021

#### 10mA nominal

Parameter	Min	Typ	Max	Unit
Regulated Current ( $I_{lim}$ ) at 25°C	8.5	10.0	11.5	mA
Regulated Current ( $I_{lim}$ ) at -40°C		8.7		mA
Regulated Current ( $I_{lim}$ ) at +85°C		9.4		mA
Operating voltage for 90% regulated current	2.0	3.0	4.0	V
Absolute Temperature Coefficient (20V)		7.6		$\mu A / ^\circ C$
Voltage Coefficient (20V to 250V)		0.4	0.6	mA / 100V
AC Resistance	165	240		k $\Omega$
$V_{Enable}$ fo 90% regulated current	2.0	3.1	4.0	V
$V_{Enable}$ current ( $V_{Enable} = 5V, 25^\circ C$ )		18	30	$\mu A$
$V_{Enable}$ current ( $V_{Enable} = 8V, 85^\circ C$ )		65		$\mu A$

#### 5mA nominal

Parameter	Min	Typ	Max	Unit
Regulated Current ( $I_{lim}$ ) at 25°C	4.2	5.0	5.8	mA
Regulated Current ( $I_{lim}$ ) at -40°C		4.8		mA
Regulated Current ( $I_{lim}$ ) at +85°C		4.7		mA
Operating voltage for 90% regulated current	2.0	3.0	4.0	V
Absolute Temperature Coefficient (20V)		7.6		$\mu A / ^\circ C$
Voltage Coefficient (20V to 250V)		0.4	0.6	mA / 100V
AC Resistance	165	240		k $\Omega$
$V_{Enable}$ fo 90% regulated current	2.0	3.1	4.0	V
$V_{Enable}$ current ( $V_{Enable} = 5V, 25^\circ C$ )		18	30	$\mu A$
$V_{Enable}$ current ( $V_{Enable} = 8V, 85^\circ C$ )		65		$\mu A$







# CL2


## Unipolar Current Regulator

### 5-30mA Temperature Compensated

Preliminary - February 2021

#### Characteristic Curves (25°C, 20mA version)

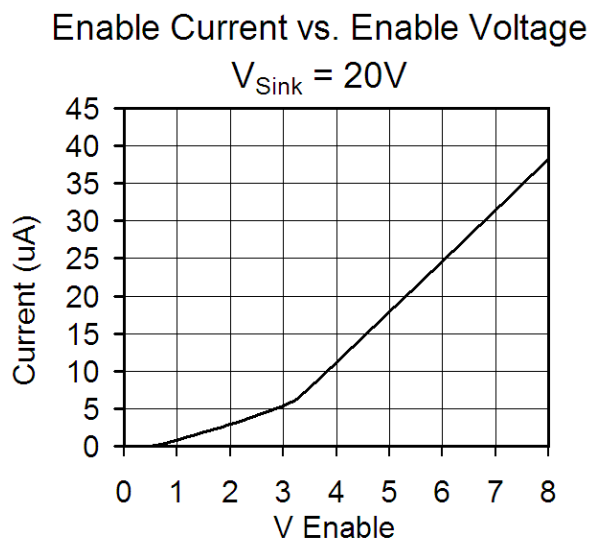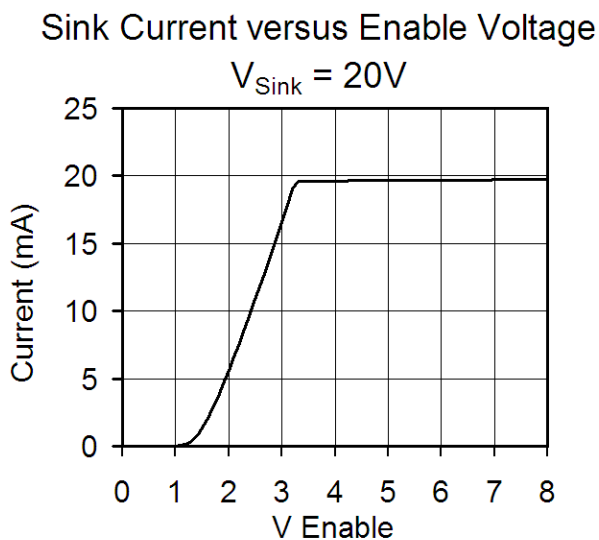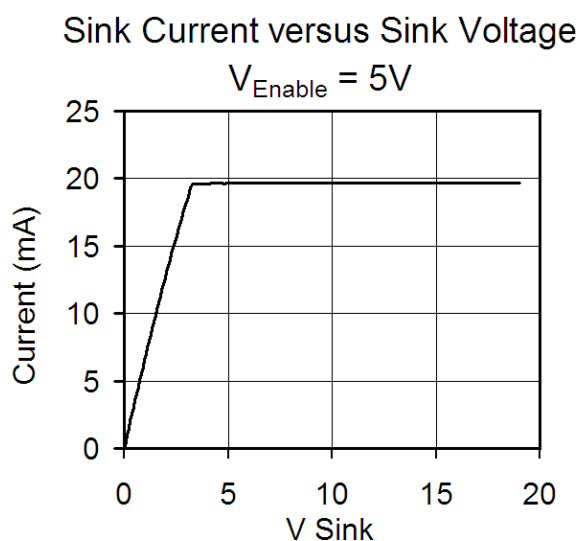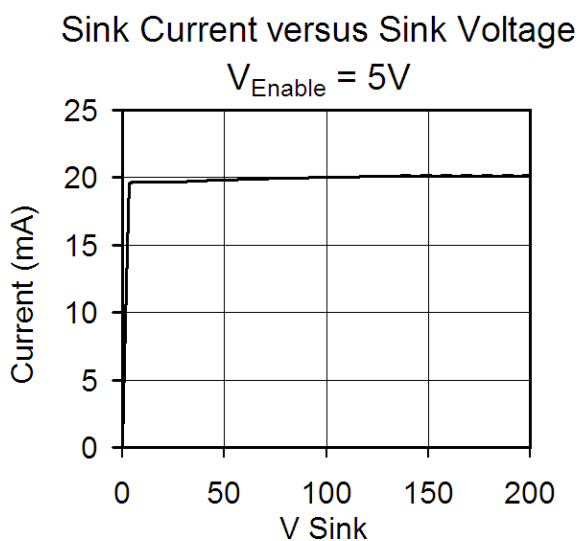



# CL2


## Unipolar Current Regulator


### 5-30mA Temperature Compensated

Preliminary - February 2021

#### Temperature Compensation (20mA version)

$I_{lim}$  from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

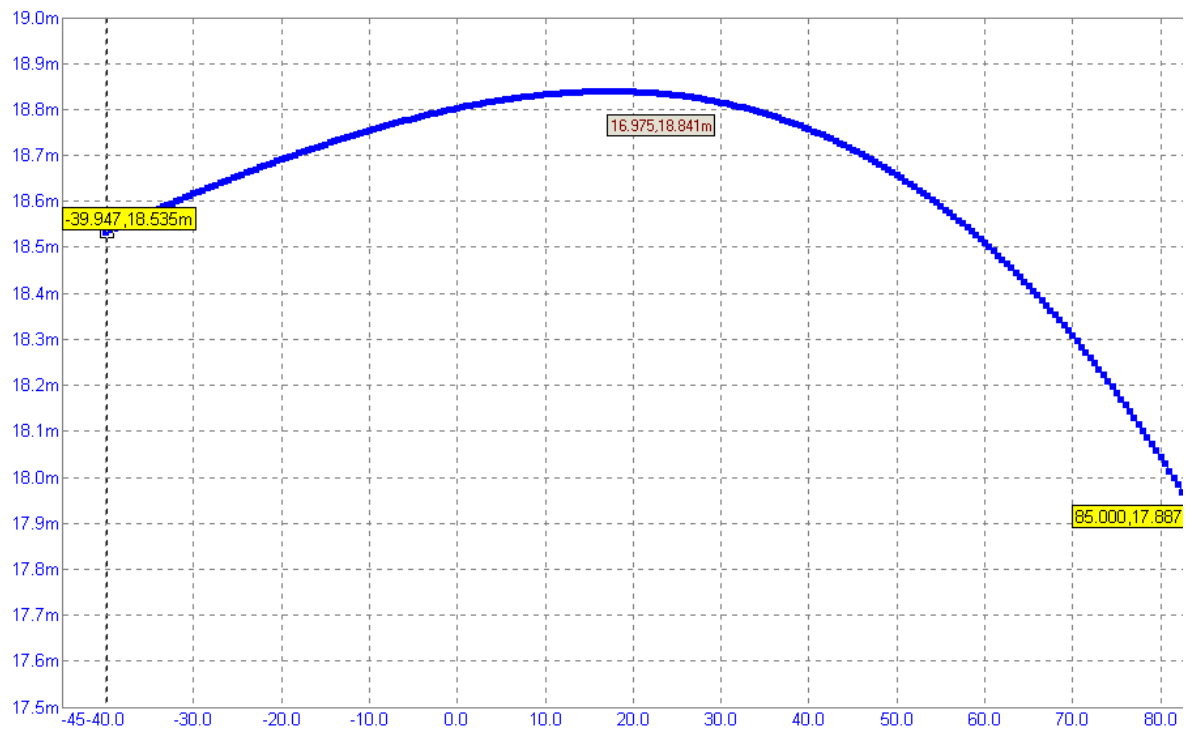




# CL2

## Unipolar Current Regulator


### 5-30mA Temperature Compensated

Preliminary - February 2021

#### Typical Application Circuit

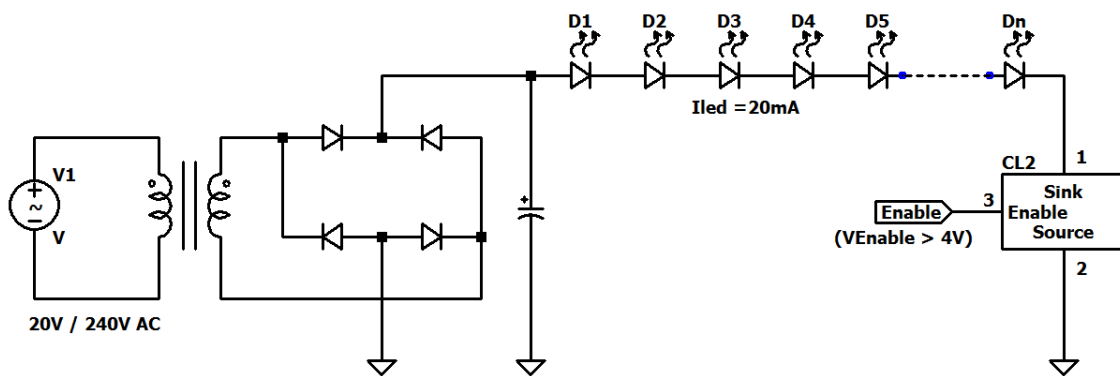





# CL2


## Unipolar Current Regulator

### 5-30mA Temperature Compensated


Preliminary - February 2021

## Package Dimensions


### 3-Lead TO-252 (DPAK)

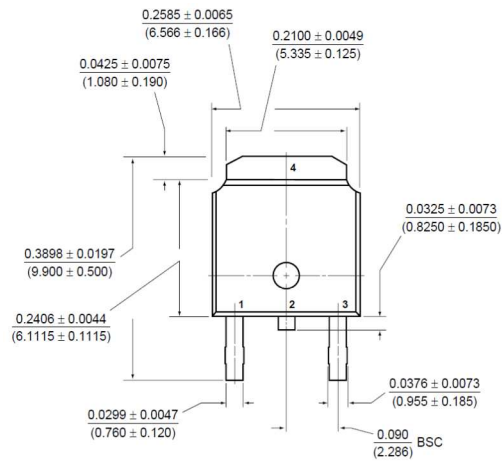

**Front view**

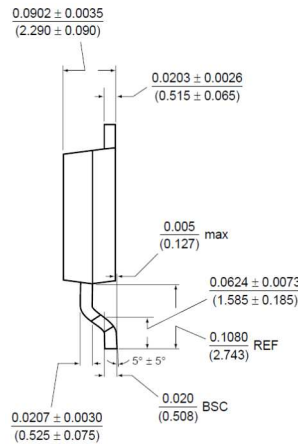


**Side view**




**Rear view**


### 3-Lead SOT-223

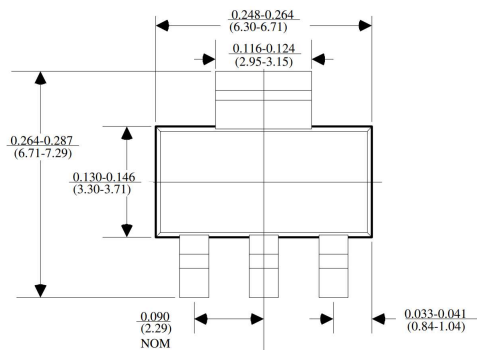


**Front view**



**Side view**

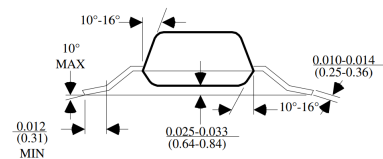

**Rear view**




# CL2

## Unipolar Current Regulator

### 5-30mA Temperature Compensated

Preliminary - February 2021

#### Product Identification Codes

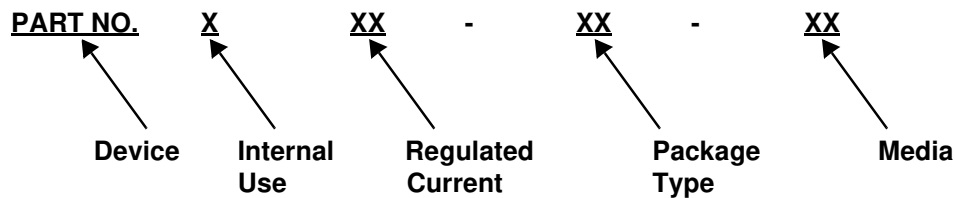

Device: CL2 = Temperature Compensated Unipolar Current Regulator

Internal use: A = Internal Use  
B  
C

Regulated Current: 5 = 5mA  
10 = 10mA  
15 = 15mA  
20 = 20mA  
30 = 30mA

Package: M = SOT-223  
ST = TO-252 (DPAK)

Media Type: B = Bulk Samples  
T = Tubes  
TR = Tape & Reel